

OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER

SECTION 14 TOWNSHIP 15 RANGE 3

DATE: 6-20-06

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 6-6-01

IN. S.P.C. E ZONE NAD '83

NAME: 15031401

N: 500044.0870(m)

E: 56205.9571(m)

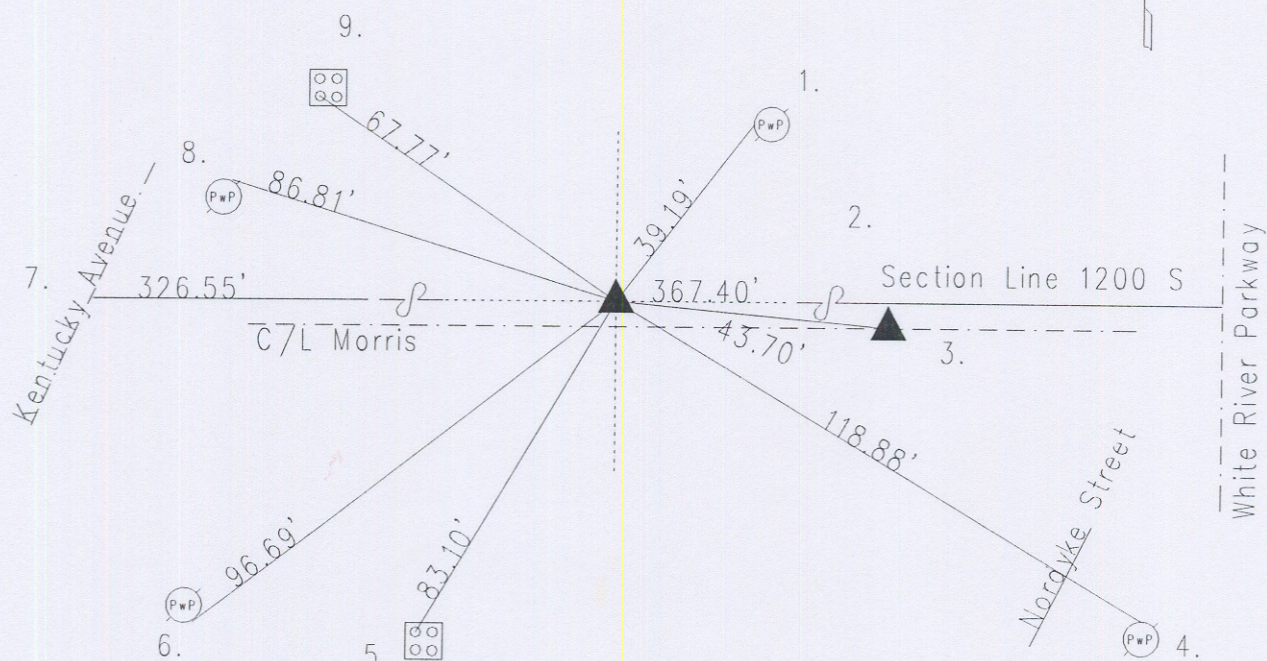

Original post set 1820 by Laughlin with witness: 24" hackberry N 50 E 6 links; 12" box elder S 50 W 5 links per Marion County Atlas pg. 6. Fatout 9-10-1884 called no stone nor witness. A prorated measurement between C/L of Kentucky Ave. and C/L of Drover Street based on a Legal Survey by Fatout. A capped rebar was set by Cleveland 2-28-96. Excavated 4-29-96 by Whiteside and a Harrison set in accordance with the Morris Street Construction project. Re-tied 7-18-96 by Kiste. Re-tied 6-6-01 by Wilcoxon. Re-tied 6-20-06 by Wilcoxon. 15031401

REF.	DISTANCE	DESCRIPTION
1.	39.19'	PK nail W PwP#294-564 B 12"up
2.	367.40'	Due F to C/I of White River Parkway
3.	43.70'	C/I of Morris Street ( C/I Harrison)
4.	118.88'	PK nail N PwP#72-564B 8"up
5.	83.10'	Cut 'x' NW bolt of sign post base
6.	96.69'	PK nail SF PwP#157-563B 10"up
7.	326.55'	Due W to C/I of Kentucky Avenue
8.	86.81'	PK nail F PwP no# 10"up
9.	67.77'	Cut 'x' SW bolt of sign pole base